



THE
SPRAY NOZZLE
PEOPLE

MaxiPass®

Full Cone
Max. Free Passage



FULL CONE

DESIGN FEATURES

- ✓ Ultimate clog-resistant design with largest free passage available in a full cone nozzle
- ✓ Two unique S-shaped internal vanes allow free passage of particles
- ✓ High energy efficiency
- ✓ Easily handles dirty, lumpy liquids
- ✓ Male and female connections
- ✓ Flanged connection available
- ✓ Patented design

SPRAY CHARACTERISTICS

- ✓ High reliability spray performance under the most difficult conditions
- ✓ Spray pattern: Full Cone (Square patterns to special order)
- ✓ Spray angles: 30°, 60°, 90° and 120°*
- ✓ Flow rates: 2.60 to 3540 L/min (flow rates up to 17,000 L/min available)




The MP nozzle is a clog resistant full cone nozzle. It produces uniform spray distribution with a relatively coarse atomisation. The MP is used in a wide range of applications including:

Parts Cooling
Gas Scrubbing
Deluge Cooling
Fluid Distribution
Foam Control
And many more.


CALL NOW : +44 (0) 1273 400092

www.spray-nozzle.co.uk


The Go-to People for spray nozzle solutions




Full Cone 30° (NN)



Full Cone 60° (N)



Full Cone 90° (M)

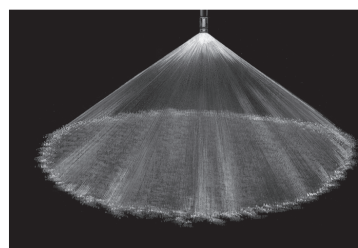

Full Cone 120° (W)

MaxiPass® Flow Rates and Dimensions

Full Cone, 30°(NN), 60°(N), 90°(M) and 120°(W) Spray Angles, 3/8" to 4" Pipe Sizes, BSP or NPT

Standard materials: Brass, 316 ss, PVC, Polypropylene and PTFE (PTFE not available in 3/4" and 1/2" sizes)

Male or Female Pipe Size	Nozzle No	K Factor	Litres per minute @ BAR								Approx Free Passage Dia (mm)	Approx Dimensions (mm) Overall Length					Wt (kg) Metal
			0.2 BAR	0.3 BAR	0.5 BAR	0.7 BAR	1 BAR	2 BAR	3 BAR	5 BAR		30° A	60° A	90° A	120° A	B	
3/8"	MP125	5.53	2.6	3.14	3.99	4.68	5.53	7.66	9.27	11.8	3.18						0.09
	MP156	8.79	4.13	4.99	6.35	7.43	8.79	12.2	14.7	18.7	3.97	76.2	38.1	38.1	38.1	22.2	0.09
	MP187	12.7	5.96	7.21	9.17	10.7	12.7	17.6	21.3	27.1	4.76						0.07
1/2"	MP187	12.7	5.96	7.21	4.76	10.7	12.7	17.6	21.3	27.1	4.76						0.13
	MP218	20.2	9.48	11.5	14.6	17.1	20.2	28	33.9	43	5.56	102	47.6	47.6	47.6	25.4	0.11
	MP250	22.7	10.7	12.9	16.4	19.2	22.7	31.4	38	48.4	6.35						0.11
3/4"	MP281	27.9	13.1	15.8	20.1	23.6	27.9	38.6	46.8	59.4	7.14						0.23
	MP312	33.8	15.9	19.2	24.4	28.6	33.8	46.8	56.6	72	7.94						0.23
	MP343	41.4	19.4	23.5	29.9	35	41.4	57.3	69.4	88.2	8.73	102	63.5	60.3	63.5	31.8	0.2
	MP375	48.8	22.9	27.7	35.2	41.3	48.8	67.6	81.8	104	9.53						0.2
1"	MP375	48.8	9.53	27.7	35.2	41.3	48.8	67.6	81.8	104	9.53						0.35
	MP406	58.5	27.5	33.2	42.2	49.2	58.5	81	98	125	10.3	111	74.6	74.6	74.6	38.1	0.33
	MP437	68.4	32.1	38.8	49.4	57.8	68.4	94.7	115	146	11.1						0.33
1 1/4"	MP437	68.4	11.1	38.8	49.4	57.8	68.4	94.7	115	146	11.1	137	85.9	85.9	85.9	50.8	0.61
	MP500	87.9	41.3	49.9	63.5	74.3	87.9	122	148	187	12.7	137	85.7	85.7	85.7	50.8	0.61
	MP531	97.6	45.8	55.4	70.5	82.5	97.6	135	164	208	13.5	137	85.7	85.7	85.7	50.8	0.61
	MP562	107	20.5	60.8	77.3	90.5	107	148	179	228	14.3	137	85.7	85.7	85.7	50.8	0.61
1 1/2"	MP562	107	50.2	60.8	77.3	90.5	107	148	179	228	13.97	184	111	111	111	57.2	0.91
	MP593	122	57.3	69.3	88.1	103	122	169	205	260	15.1	184	111	111	111	57.2	0.91
	MP625	130	61	73.8	93.9	110	130	180	218	277	15.9	184	111	111	111	57.2	0.91
	MP656	158	74.2	89.7	114	134	158	219	265	337	16.7	184	111	111	111	57.2	0.91
	MP687	166	77.9	94.3	120	140	166	230	278	354	17.5	184	111	111	111	57.2	0.91

Flow Rate (l/min) = K (bar)^{0.47}



A cutaway view of the MaxiPass nozzle showing the S-shaped vanes that enable the nozzle to successfully handle large particles without clogging.




MaxiPass™
Free Passage



Traditional Full Cone
Free Passage


A comparison of the free passage available with the BETE MaxiPass nozzle compared to the free passage of a traditional full cone nozzle. The BETE MaxiPass is designed to pass solid particles that are 2-3 times larger in diameter than particles that will pass through a traditional full cone nozzle.




3/8" - 1 1/2" PIPE SIZES




30° (NN)



60° (N)



90° (M)



120° (W)

MaxiPass® Flow Rates and Dimensions

Full Cone, 30°(NN), 60°(N), 90°(M) and 120°(W) Spray Angles, 3/8" to 4" Pipe Sizes, BSP or NPT

Standard materials: Brass, 316 ss, PVC, Polypropylene and PTFE

Male or Female Pipe Size	Nozzle No	K Factor	Litres per minute @ BAR									Approx Dimensions (mm) Overall Length					Wt (kg) Metal
			0.2 BAR	0.3 BAR	0.5 BAR	0.7 BAR	1 BAR	2 BAR	3 BAR	5 BAR	Approx Free Passage Dia (mm)	30°	60°	90°	120°		
												A	A	A	A	C	
2"	MP750	202	94.8	115	146	171	202	280	339	430	19.1	210	178	146	159	66.8	1.59
	MP812	221	104	126	160	187	221	306	370	471	20.6	210	183	146	159	66.8	1.59
	MP875	273	129	155	197	231	273	378	458	582	22.2	210	183	146	159	66.8	1.59
	MP937	306	144	174	221	259	306	424	513	652	23.8	229	194	152	165	82.6	1.7
	MP1000	358	168	203	259	303	358	496	600	763	25.4	262	194	152	168	82.6	1.7
	MP1125	439	206	249	317	371	439	608	736	935	28.6	262	194	152	171	82.6	1.7
2 1/2"	MP1000	358	168	203	259	303	358	496	600	763	25.4	262	194	152	168	82.6	2.04
	MP1125	439	206	249	317	371	439	608	736	935	28.6	267	213	165	178	82.6	2.04
	MP1250	527	247	299	381	446	527	730	883	1120	31.5	305	244	165	181	82.6	2.04
	MP1375	632	297	359	456	535	632	875	1060	1350	34.9	305	244	213	229	102	2.84
	MP1500	774	363	440	559	655	774	1070	1230	1650	38.1	330	267	213	229	102	2.84
3"	MP1500	774	363	440	559	655	774	1070	1230	1650	37.1	343	279	229	248	121	3.29
	MP1625	911	428	517	658	770	911	1260	1530	1940	41.3	343	279	229	251	121	3.29
	MP1750	1040	488	591	751	880	1040	1440	1740	2220	44.5	343	279	229	251	121	3.29

Flow Rate (l/min) = K (bar)^{0.47}

Ask our technical sales engineers about additional products and services to optimise your spraying process.

Spray Calibration Solutions

Easy-to-use, fast measurement solutions to ensure accurate nozzle installation and maintenance, reduce water wastage and identify nozzle wear.



Spray Pattern & Droplet Distribution



Nozzle Flow Calibrators



Nozzle Cleaning Kit

Complete Spray Bars

Tailored nozzle selections and spray bar designs that integrate seamlessly with your new or existing setup.


- ✓ Expert nozzle selection and placement
- ✓ Efficient spray coverage
- ✓ Fast turnaround time
- ✓ Reduced design burden
- ✓ High-quality spray bars



Complete Custom Spraying Systems

Complete spraying systems built around your goals and application.

- ✓ Tailored upstream components supplied individually or as part of complete system
- ✓ Custom pipework, pumps, tanks, sensors, valves, heating, control panels and more
- ✓ Seamless integration with existing processes
- ✓ Built to budget and ROI targets
- ✓ End-to-end support: design, install, maintain

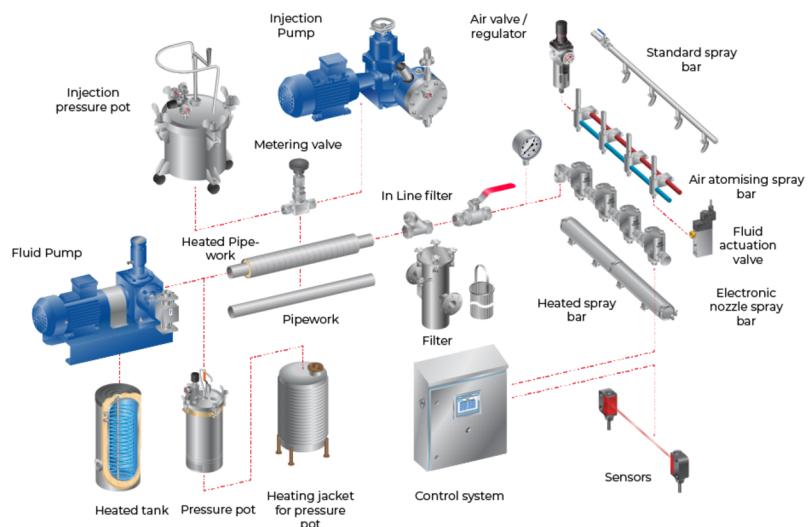

THE GO-TO PEOPLE FOR SUCCESSFUL SPRAY ENGINEERING