



THE
SPRAY NOZZLE
PEOPLE

XASF

Siphon-fed
Internal Mix
Flat Fan



AIR ATOMISING

DESIGN FEATURES

- ✓ Siphon fed - does not require pressurised fluid feed, only air
- ✓ Internal mix
- ✓ Very low flow rates
- ✓ Modular design allows swapping between nozzle type by changing air and fluid caps
- ✓ Different body options with variable inlet orientations
- ✓ Adaptor for mounting the nozzles through walls
- ✓ Optional air shut-off system
- ✓ Optional clean out pins

SPRAY CHARACTERISTICS

- ✓ Spray pattern: Flat Fan
- ✓ Spray angles: 60° to 85°
- ✓ Flow rates: 0.8-7.6 l/hr
- ✓ Very fine atomisation
- ✓ Small forward spray projection




The XASF is a siphon fed, internal mix, air atomising nozzle. Its siphon fed design means that the fluid feed does not need to be pressurised. So, no fluid pump is required. This design also allows for very low flow rates below 1 litre per hour. The XASF can be useful in a number of applications including:

Coating
Moistening
Lubrication
And more.

CALL NOW : +44 (0) 1273 400092

www.spray-nozzle.co.uk

The Go-to People for spray nozzle solutions

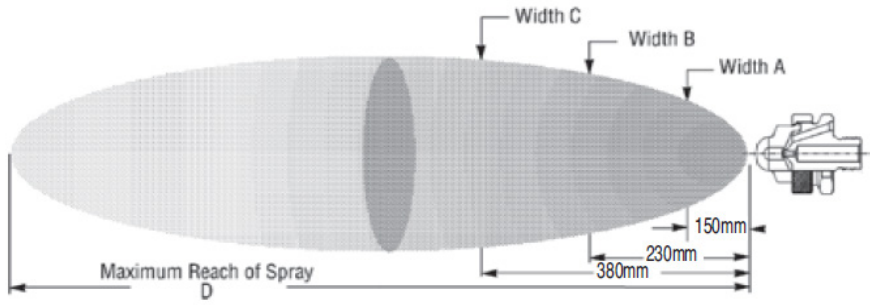

XASF Set-up Flow Rates and Dimensions

Siphon-fed, Internal Mix, Flat Fan Spray Pattern, 1/8" and 1/4" Pipe Sizes, BSP or NPT
Standard Materials: Nickel-plated Brass, 303 and 316 Stainless Steel

Liquid Capacity in litres per hour

Spray Dimensions at 200 mm Siphon Height

Spray Set-up	Fluid & Air Cap	Atomising Air		Gravity Head (mm)		Siphon Height (mm)					Spray Dimensions at 200 mm Siphon Height					
		Air bar	Nm ³ /hr	450	300	150	100	200	300	600	900	Air bar	A mm	B mm	C mm	D m
SF050	FC3 & AC1101	0.7	1.68	1.3	1.2	1.1	1	1	0.8	0.6	0.5	0.7	200	260	380	2.1
		1.5	2.58	1.2	1.1	1	0.9	0.9	0.8	0.7	0.5	1.5	210	290	380	2.1
		2	3	0.8	0.8	0.7	0.6	0.5				2	230	300	380	1.8
SF100	FC6 & AC1102	1.5	3.36	3.7	3.5	3.3	2.9	2.8	2.5	2.3	2.1	1.5	230	320	380	2.7
		2	3.9	3.4	3.3	3.1	2.8	2.7	2.6	2.4	2.2	2	240	340	420	2.7
		3	5.22	2.8	2.7	2.5	2.4	2.2	2.1	1.9	1.7	3	270	370	460	3
		4	6.6	1.9	1.8	1.6	1.5	1.3	1.2			4	280	390	480	2.7
SF150	FC2 & AC1103	1.5	4.08	5.1	4.8	4.5	3.8	3.7	3.5	3	2.4	1.5	190	230	270	3.4
		2	4.68	4.9	4.7	4.4	3.6	3.4	3.2	2.9	2.3	2	200	250	280	3.4
		3	6.18	3.4	3.2	3	2.2	2	1.7			3	220	270	300	3
		3.5	7.02	2.2	2	1.7										
SF200	FC2 & AC1104	1.5	3.78	7.6	7.2	6.6	5.7	5.4	5.1	4.6	3.7	1.5	170	220	270	3.4
		2	4.38	7.6	7.3	6.8	5.9	5.7	5.5	5	4.2	2	180	230	290	3.4
		3	5.76	6.4	6.1	5.7	5	4.5	4.1	3.3		3	200	270	330	3.4
		3.5	6.6	4.2	3.7	3.2	2.6									